





WS3

7.5" LED HEXAGON

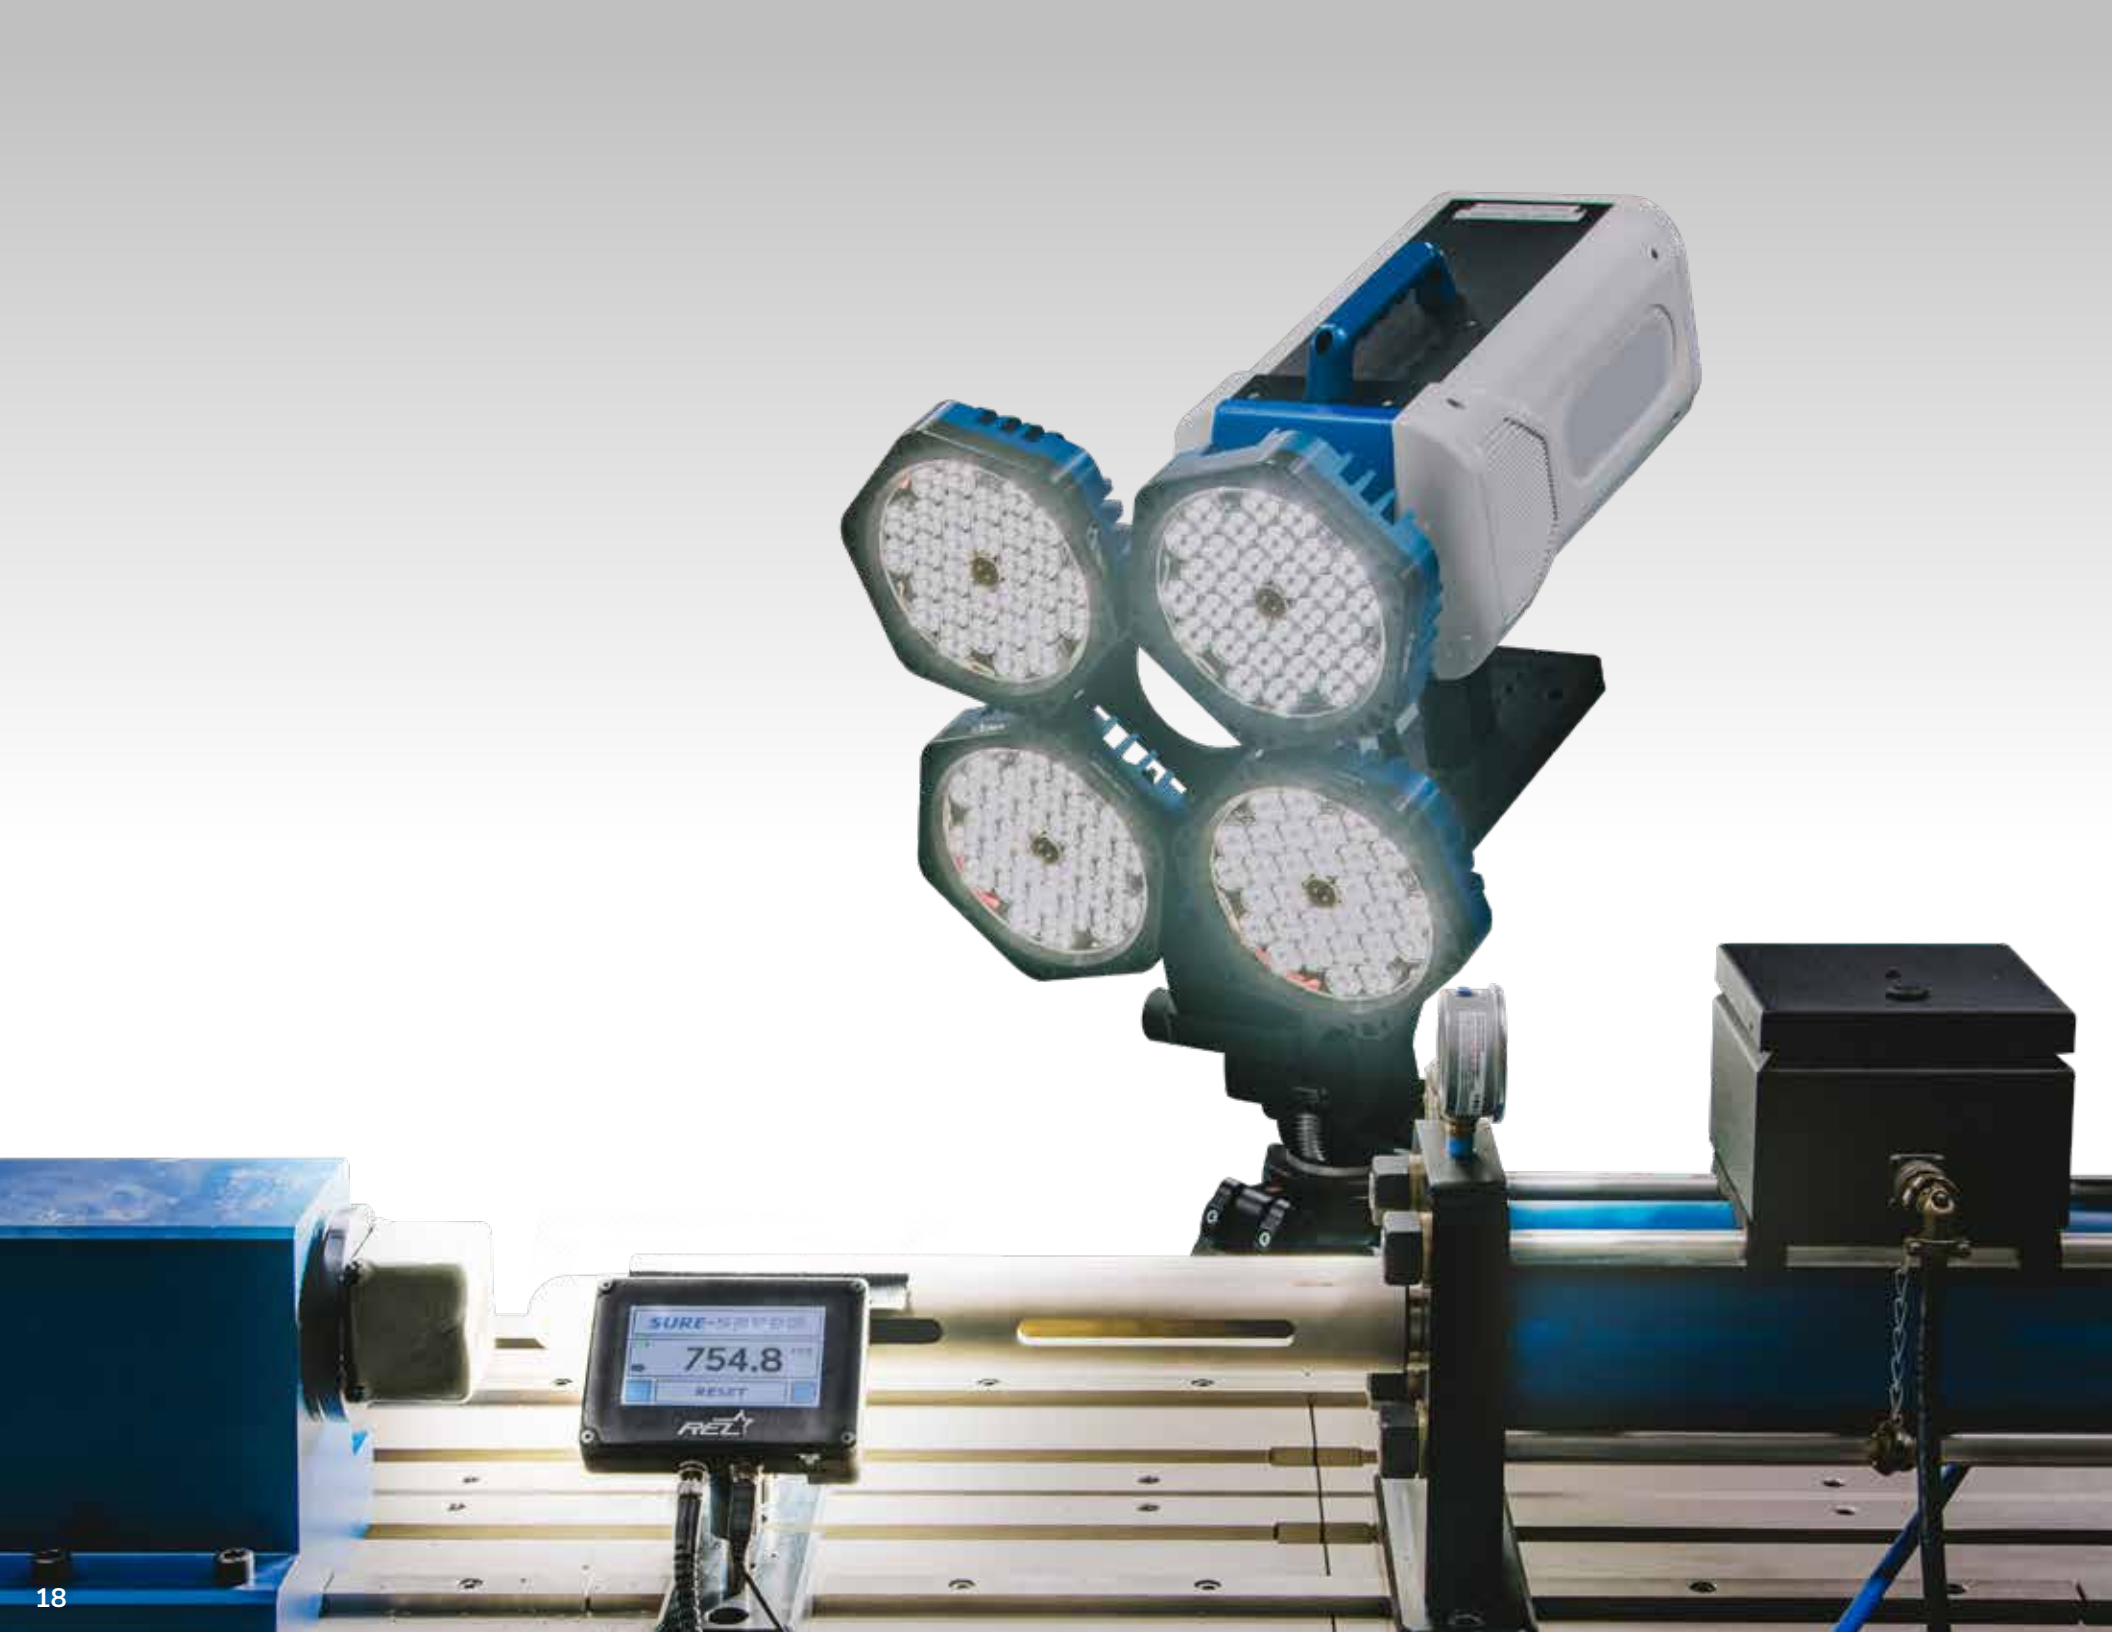

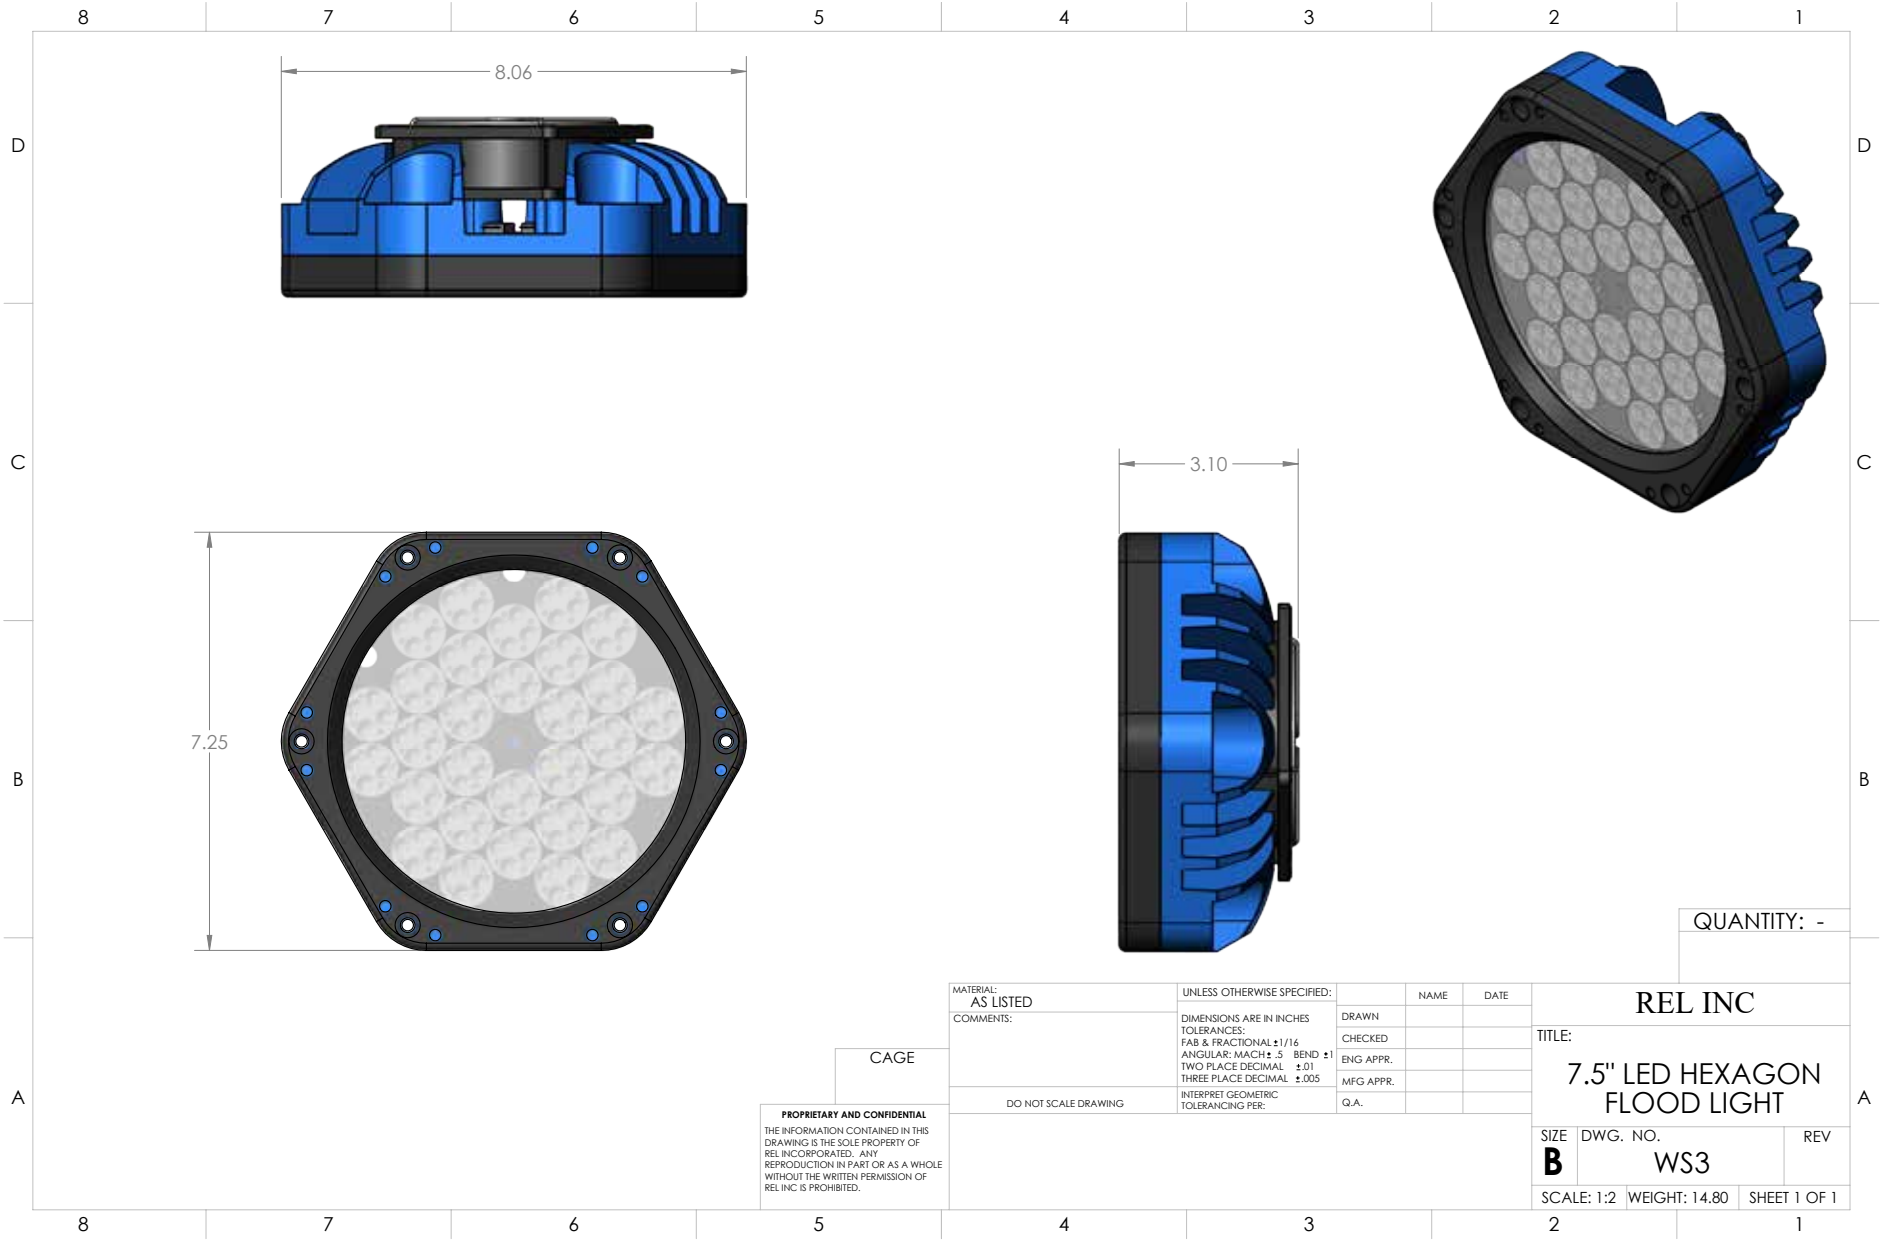


WS3

Our WS3 light module is the core of REL's Visible Spectrum LED floodlighting solutions. This unit packs an extraordinary amount of power and versatility into a compact, durable, machined, military-grade aluminum housing unit that can withstand the rigors of dynamic test labs. Flying debris welcome!

EQUIPMENT HIGHLIGHTS

- ▲ 9.2k lux (66k lumens) at 4m peak continuous capacity using the PS1 power supply
- ▲ 29.5k lux (211k lumens) at 4m peak burst capacity using the PS4 power supply with on WS3
- ▲ WS3-PS4-K4: 106k lux (760k lumens) at 4m peak burst capacity using the PS4 power supply with 4 - WS3'S
- ▲ Includes Magnetic Laser Alignment Sight for quick and accurate light beam focus
- ▲ Thermal shut off protection
- ▲ Tripod ready and featuring 1/4-20 machined holes for a variety of mounting options
- ▲ 1.9m FWHM spot at 4m
- ▲ Up to 50' cord length
- ▲ 28 deg beam (WS3) 41 deg beam (WS3-41)
- ▲ Dimensions: 7.25"W x 8"H
- ▲ Weight: 5.8 lbs.

BEAM PROFILE

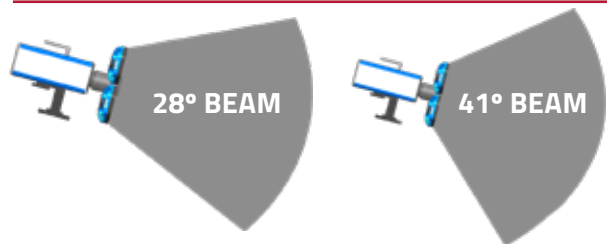

1. Array features
2. CG2-100 Controller
3. Magnetic Laser Alignment Sight







WS3-PS4-K2

- ▲ 2 - 7.5" LED Hexagon 28 Degree Flood Light Modules
- ▲ 54 Volt, 4 Channel, 20kW output capacitive burst power supply w/ dimming
- ▲ CG2-100 Controller
- ▲ 0-10V Trigger and Fan Override
- ▲ Magnetic Laser Alignment Sight
- ▲ 2 - TRM-100 Tripod Kits
- ▲ Pelican case





WS3-K

- ▲ 7.5" LED Hexagon 28 Degree Flood Light Module
- ▲ 54 Volt 600W continuous power supply
- ▲ TRM-100 Tripod Kit

WS SERIES OUTPUT DATA

Kit-Model #	Power Supply (# of Lamps in Kit)	Lamp voltage	Power Output	Beam Angle	Candela	Lumen	Intensity	Spot Diameter	Distance
WS1-K	PS1-36V	36 Volts	600W	-	-	50k	10 M lux	25mm	300mm
WS2-K	PS1-48V	48 Volts	600W	5 Deg	2400k	60k	150 k lux	0.3m	4m
WS2-K4	PS2-48V (4xWS2)	48 Volts	2400W	5 Deg	9600k	240k	600 k lux	0.3m	4m
WS3-K	PS1-LITE	54 Volts	600W	28 Deg	147k	66k	9.2 k lux	1.9m	4m
WS3-K2	PS2 (2xWS3)	54 Volts	1200W	28 Deg	294k	132k	18.4 k lux	1.9m	4m
WS3-K4	PS2 (4xWS3)	54 Volts	2400W	28 Deg	588k	264k	36.8 k lux	1.9m	4m
WS3-41-K	PS1-LITE	54 Volts	600W	41 Deg	58k	66k	3.6k lux	3.0m	4m
WS3-41-K2	PS2 (2xWS3)	54 Volts	1200W	41 Deg	116k	132k	7.2k lux	3.0m	4m
WS3-41-K4	PS2 (4xWS3)	54 Volts	2400W	41 Deg	232k	264k	14.4k lux	3.0m	4m
WS3-PS4-K	PS4	54 Volts	3.5kW	28 Deg	472k	211k	29.5k lux	1.9m	4m
WS3-PS4-K2	PS4 (2xWS3)	54 Volts	6kW	28 Deg	880k	394k	55k lux	1.9m	4m
WS3-PS4-K4	PS4 (4xWS3)	54 Volts	11kW	28 Deg	1696k	760k	106k lux	1.9m	4m
WS4-K	PS5	54 Volts	240W	15 Deg	164k	16k	10.5k lux	1.0m	4m



REL, Inc.
57640 North Eleventh St
Calumet, MI 49913
906-337-3018 ext 302
rel@relinc.com



**MADE IN
THE USA**

relinc.com